




Turnbuckle (eye-eye)

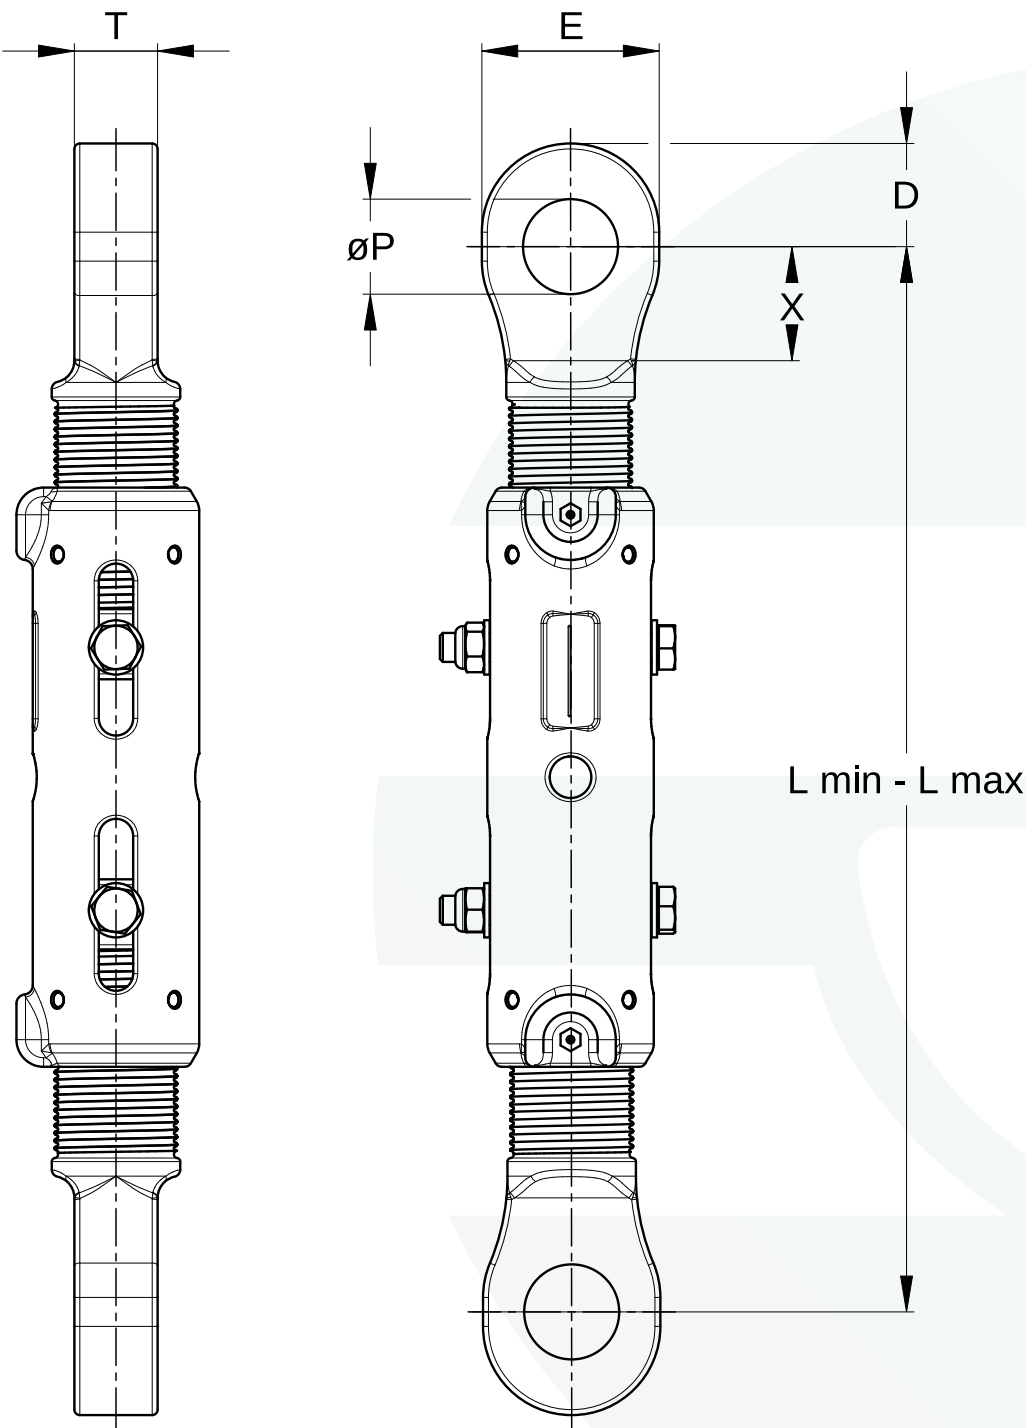

AQUALLINE TURNBUCKLE (EYE-EYE). MM DIMENSIONS

Model Number	MBL (Mtons)	D	E	Lmin	Lmax	Adjustability	øP	T	X	Weight (kg)
TBL 800-EE	40	40	68	390	500	110	35	34	55	8
TBL 804-EE	55	48	80	435	545	130	41	40	60	13
TBL 808-EE	80	58	98	500	650	150	51	45	75	18
TBL 811-EE	100	64	108	550	750	200	57	52	85	23
TBL 815-EE	130	72	124	660	850	190	63	63	100	35
TBL 818-EE	160	83	140	720	920	200	70	76	105	48
TBL 820-EE	200	85	148	775	995	220	76	76	115	60
TBL 825-EE	250	98	170	920	1170	250	89	82	135	85

AQUALLINE TURNBUCKLE (EYE-EYE). MM DIMENSIONS

Model Number	MBL (Mtons)	D	E	Lmin	Lmax	Adjustability	øP	T	X	Weight (lbs)
TBL 800-EE	40	1.57	2.68	15.35	19.69	4.33	1.38	1.34	2.17	17.64
TBL 804-EE	55	1.89	3.15	17.13	21.46	5.12	1.61	1.57	2.36	28.66
TBL 808-EE	80	2.28	3.86	19.69	25.59	5.91	2.01	1.77	2.95	39.68
TBL 811-EE	100	2.52	4.25	21.65	29.53	7.87	2.24	2.05	3.35	50.71
TBL 815-EE	130	2.83	4.88	25.98	33.46	7.48	2.48	2.48	3.94	77.16
TBL 818-EE	160	3.27	5.51	28.35	36.22	7.87	2.76	2.99	4.13	105.82
TBL 820-EE	200	3.35	5.83	30.51	39.17	8.66	2.99	2.99	4.53	132.28
TBL 825-EE	250	3.86	6.69	36.22	46.06	9.84	3.50	3.23	5.31	187.39

MBL = Minimum Breaking Load
All turnbuckles are supplied with a zinc-nickel plated coating, with the tube and eye connections delivered in a primer finish (RAL 170 60 45).
For more information read our 'Warnings and instructions for use'.