




Turnbuckle (eye-jaw)

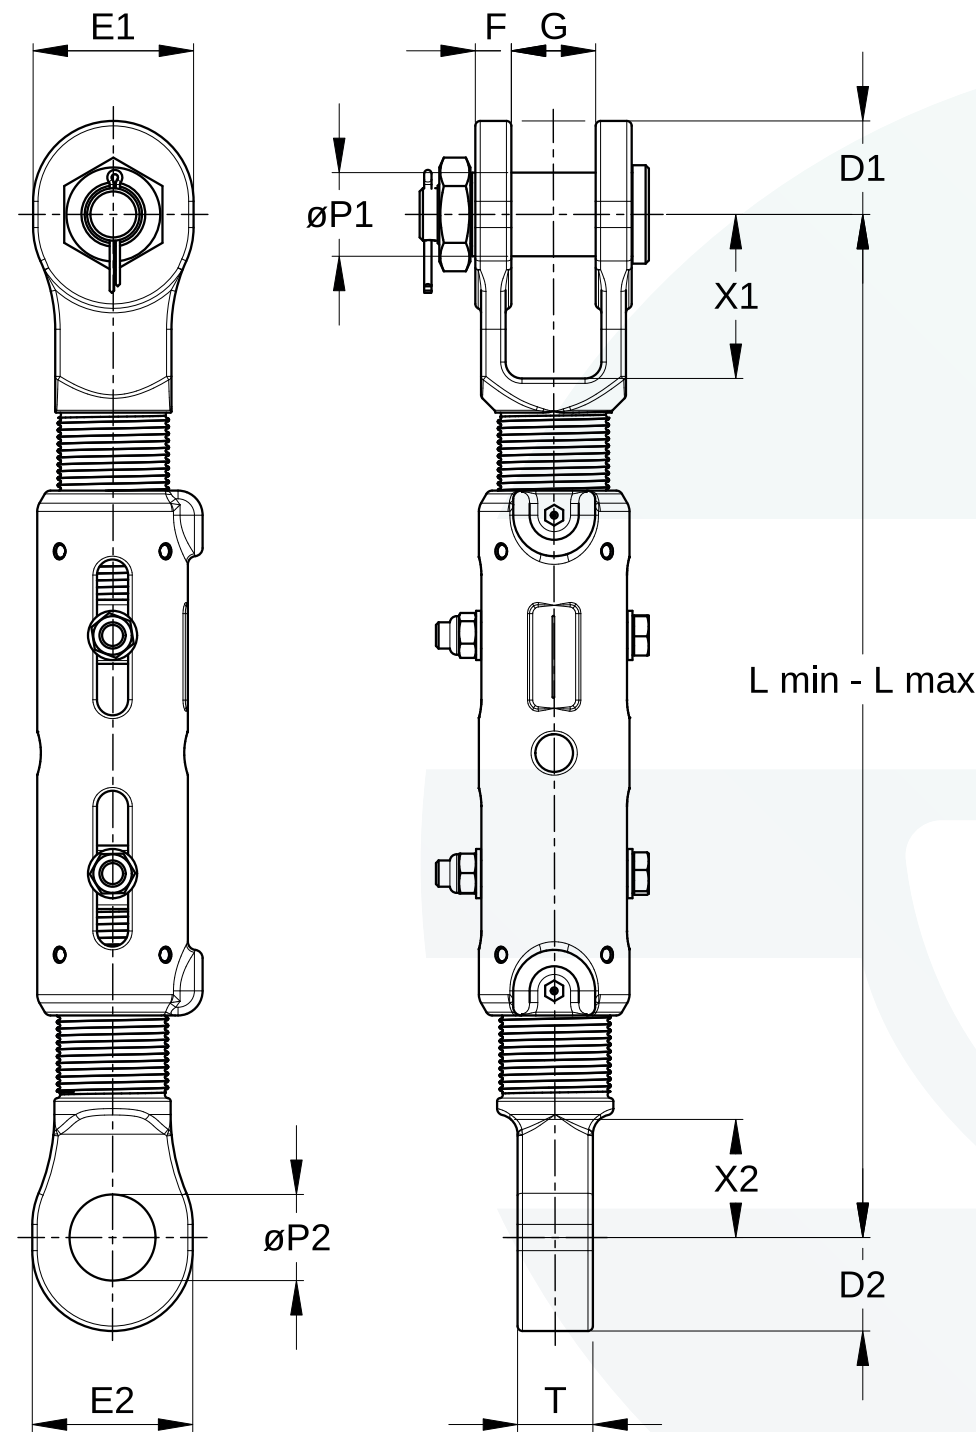

AQUALLINE TURNBUCKLE (EYE-JAW). MM DIMENSIONS

Model Number	MBL (Mtons)	D1	E1	F	G	øP1	X1	Lmin	Lmax	Adjustability	D2	E2	øP2	X2	T	Weight (kg)
TBL 800-EY	40	45	74	16.5	38	35	55	410	520	110	40	68	35	55	34	8.5
TBL 804-EY	55	53	90	20.5	45	41	62	460	590	130	48	80	41	60	40	15
TBL 808-EY	80	64	108	22.5	51	51	100	530	680	150	58	98	51	75	45	20
TBL 811-EY	100	67	114	25	57	57	85	600	800	200	64	108	57	85	52	28
TBL 815-EY	130	77	135	28	63	63	95	670	860	190	72	124	63	100	63	37
TBL 818-EY	160	83	146	30	76	70	105	735	935	200	83	140	70	105	76	51
TBL 820-EY	200	89	156	33	76	76	115	790	1010	220	85	148	76	115	76	65
TBL 825-EY	250	102	178	39	89	89	135	935	1185	250	98	170	89	135	82	90

AQUALLINE TURNBUCKLE (EYE-JAW). INCH DIMENSIONS

Model Number	MBL (Mtons)	D1	E1	F	G	øP1	X1	Lmin	Lmax	Adjustability	D2	E2	øP2	X2	T	Weight (lbs)
TBL 800-EY	40	1.77	2.91	0.65	1.50	1.38	2.17	16.14	20.47	4.33	1.57	2.68	1.38	2.17	1.34	18.74
TBL 804-EY	55	2.09	3.54	0.81	1.77	1.61	2.44	18.11	23.23	5.12	1.89	3.15	1.61	2.36	1.57	33.07
TBL 808-EY	80	2.52	4.25	0.89	2.01	2.01	3.94	20.87	26.77	5.91	2.28	3.86	2.01	2.95	1.77	44.09
TBL 811-EY	100	2.64	4.49	0.98	2.24	2.24	3.35	23.62	31.50	7.87	2.52	4.25	2.24	3.35	2.05	61.73
TBL 815-EY	130	3.03	5.31	1.10	2.48	2.48	3.74	26.38	33.86	7.48	2.83	4.88	2.48	3.94	2.48	81.57
TBL 818-EY	160	3.27	5.75	1.18	2.99	2.76	4.13	28.94	36.81	7.87	3.27	5.51	2.76	4.13	2.99	112.44
TBL 820-EY	200	3.50	6.14	1.30	2.99	2.99	4.53	31.10	39.76	8.66	3.35	5.83	2.99	4.53	2.99	143.30
TBL 825-EY	250	4.02	7.01	1.54	3.50	3.50	5.31	36.81	46.65	9.84	3.86	6.69	3.50	5.31	3.23	198.42

MBL = Minimum Breaking Load
All turnbuckles are supplied with a zinc-nickel plated coating, with the tube, eye connection and jaw connection delivered in a primer finish (RAL 170 60 45).
For more information read our 'Warnings and instructions for use'.

