




Turnbuckle (jaw-jaw)

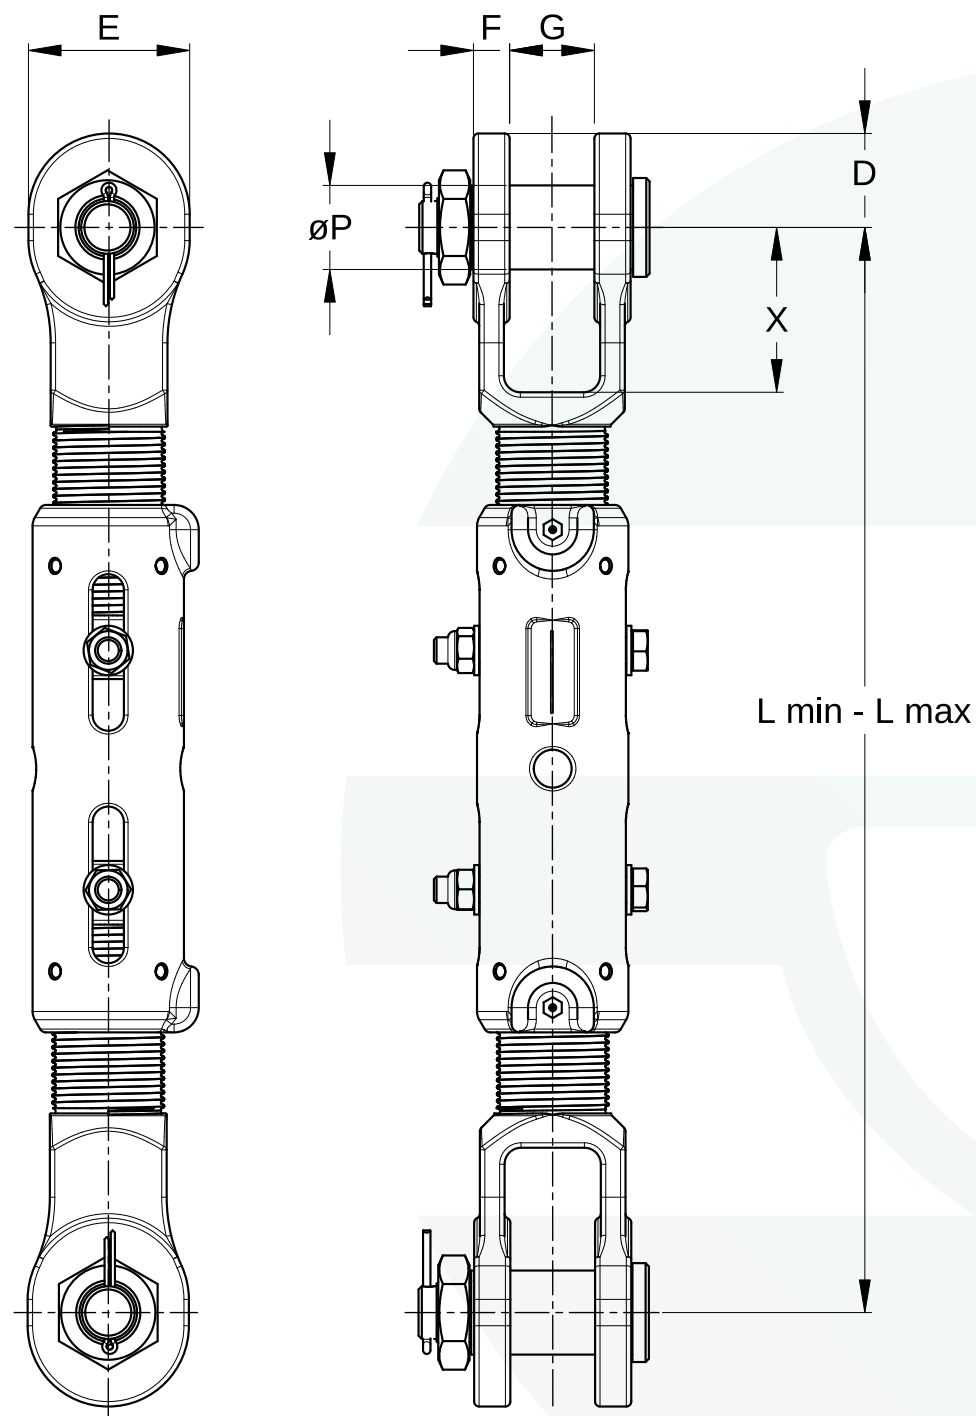

AQUALLINE TURNBUCKLE (JAW-JAW). MM DIMENSIONS

Model Number	MBL (Mtons)	D	E	F	G	Lmin	Lmax	Adjustability	øP	X	Weight (kg)
TBL 800-JJ	40	45	74	16.5	38	430	540	110	35	55	10
TBL 804-JJ	55	53	90	20.5	45	480	610	130	41	62	16
TBL 808-JJ	80	64	108	22.5	51	565	715	150	51	100	23
TBL 811-JJ	100	67	114	25	57	650	850	200	57	85	32
TBL 815-JJ	130	77	135	28	63	700	890	190	63	95	43
TBL 818-JJ	160	83	146	30	76	750	950	200	70	105	55
TBL 820-JJ	200	89	156	33	76	810	1030	220	76	115	70
TBL 825-JJ	250	102	178	39	89	950	1200	250	89	135	95

AQUALLINE TURNBUCKLE (JAW-JAW). INCH DIMENSIONS

Model Number	MBL (Mtons)	D	E	F	G	Lmin	Lmax	Adjustability	øP	X	Weight (lbs)
TBL 800-JJ	40	1.77	2.91	0.65	1.50	16.93	21.26	4.33	1.38	2.17	22.1
TBL 804-JJ	55	2.09	3.54	0.81	1.77	18.90	24.02	5.12	1.61	2.44	35.3
TBL 808-JJ	80	2.52	4.25	0.89	2.01	22.24	28.15	5.91	2.01	3.94	50.7
TBL 811-JJ	100	2.64	4.49	0.98	2.24	25.59	33.46	7.87	2.24	3.35	70.6
TBL 815-JJ	130	3.03	5.31	1.10	2.48	27.56	35.04	7.48	2.48	3.74	94.8
TBL 818-JJ	160	3.27	5.75	1.18	2.99	29.53	37.40	7.87	2.76	4.13	121.3
TBL 820-JJ	200	3.50	6.14	1.30	2.99	31.89	40.55	8.66	2.99	4.53	154.3
TBL 825-JJ	250	4.02	7.01	1.54	3.50	37.40	47.24	9.84	3.50	5.31	209.4

MBL = Minimum Breaking Load
All turnbuckles are supplied with a zinc-nickel plated coating, with the tube and jaw connections delivered in a primer finish (RAL 170 60 45).
For more information read our 'Warnings and instructions for use'.

